

NOVA FOAM PAD (FP) DOCK SEAL

SURVEY

SITE SURVEY INFORMATION

Number of Doors _____

Door Width (W) _____ FT. _____ IN.
 Door Height (H) _____ FT. _____ IN.
 Dock Height (D) _____ IN.
 Bumper Projection (B) _____ IN.
 Wall Setback (S) _____ IN.
 Leveler Cantilever (C) _____ IN.
 Distance Between Doors _____ IN.


Projections for Typical Dock/Facia Combinations:

Fig A: Bumpers Only "Flush Mount" (B)

Fig B: Wall Setback (S+B)

Fig C: Leveler Cantilever (C+B)

Fig D: Wall Setback AND Leveler Cantilever (S + C + B)

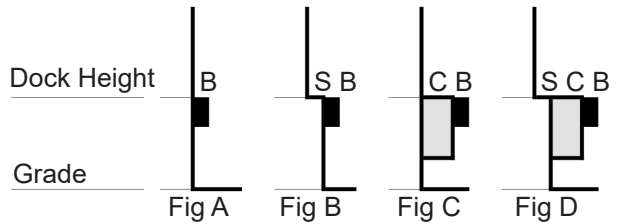

DRIVEWAY GRADE INFORMATION

Level Decline Grade % _____ Incline Grade% _____

Dock Height

$$\text{Grade\%} = \frac{R1}{R2} \times 100\% = \text{Decline \%}$$

Grade

Run (R2)

Rise (R1)

TRUCK/TRAILER INFORMATION

Width: Min _____ Max _____
 Height: Min _____ Max _____
 Length: Min _____ Max _____

Hydraulic Tailgate: No Yes Size _____
 Rear Step Section: No Yes Size _____
 Yard Jockeys: No Yes

FP SERIES OPTIONS

Color: Black (standard) Blue* Brown* Green* *Only Available in 22 oz & 40 oz

Base Material: MAX-1000™ MAX-60™ 40 oz Vinyl 22 oz Vinyl

40 oz NOVALON™** 16 oz NOVALON™**

*NOVALON™ is the equivalent replacement for HYPALON®, a trade name used by DuPont.

Wear Pleats: 4" Exposure 8" Exposure 16" Exposure Top Corners Only None

Drop Curtain: None Basic Add Pull Rope Add Chain Weight Add 2" Foam Filled

Bottom Flaps: None Inside Only Inside + Front Inside, Front + Outside Length _____ in.

Other Options: 4' Scuff Guard Full Height Scuff Guard Wear Face

Flame-Retardant Fabric None Galvanized Steel Backers



WARNING: Cancer and Reproductive Harm-www.P65Warnings.ca.gov