

# NOVA HYDRAULIC EDGE-OF-DOCK LEVELER

## COMPETITIVE PRODUCT COMPARISON

### FEATURES AND BENEFITS:

- Dual Hydraulic Deck and Lip Cylinders
- Push-button NEMA 4 control panel
- Grease fittings and piano hinges
- Four-way high tensile A572 steel
- Diamond safety tread plate
- 55,000 PSI minimum yield
- Formed center plate for added strength
- Working range 5-inch above/below dock
- 1.25 HP hydraulic power unit motor
- Capacities up to 35,000-pounds
- Standard 15-inch lip
- Beveled lip with milled edge
- Deck widths range from 66 to 84-inches
- 4-inch reinforced rubber molded bumpers
- 13 x 14-inch heavy-duty bumper blocks
- 18-inch total bumper/blockout projection
- Two steel support gussets
- Automatically returns to stored position
- 1-year warranty

**RELIABLE AND EASY TO USE:** Single push-button, NEMA 4 control panel activates the fully hydraulic lip and deck cylinders for smooth, consistent operation




### LARGEST SIZE RANGE: 66 – 84-Inches

STANDARD DECK WIDTHS				
MODEL	66"	72"	78"	84"
<b>NOVA</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
Competitor 1		X	X	
Competitor 2	X	X		
Competitor 3	X	X	X	



### GREATEST CAPACITY: 35,000-POUNDS

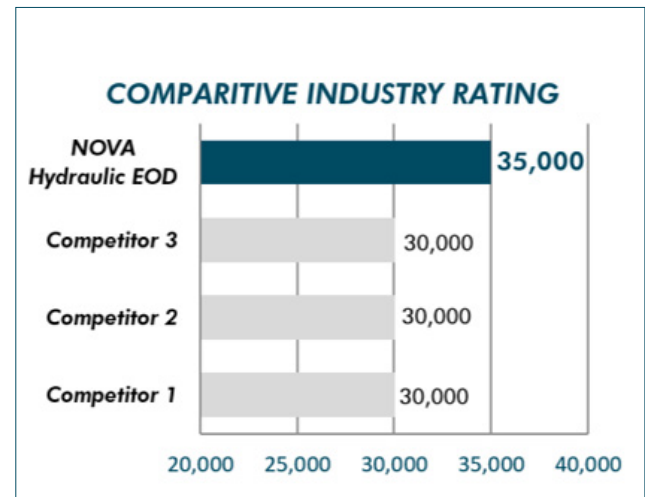

**BETTER PROTECTION:** NOVA molded rubber bumpers provide more surface area and larger mounting angles to help prevent building damage



NOVA Molded Rubber Bumpers  
4 x 13 x 12-inches



Competitor 1 4 x 10 x 13-inches    Competitor 2 2 x 8 x 18-inches    Competitor 3 4 x 10 x 13-inches



**WARNING:** Cancer and Reproductive Harm-[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)