

NOVA FOAM PAD HOOD (FPH) DOCK SEAL

COMPETITIVE PRODUCT COMPARISON


FEATURES AND BENEFITS

- Designed for door openings up to 9 x 12-feet
- Hood-style head curtain with a standard 24-inches drop (customizable to any length)
- High-density polyurethane compression foam side pads
- Standard pad projection is 10-inches
- Pressure-treated, kiln-dried wood frame
- Foam is chemically bonded to the frame
- Standard full-height yellow guide stripes
- Heavy-duty galvanized mounting hardware
- Pads are vented for air and moisture release
- Top-grade fabrics provide superior performance and maximum durability
- Velcro® attachments
- All sew lines are lock-stitched and reinforced with UV-resistant thread

BUILT TO LAST: All NOVA Dock Seal standard frames are made from pressure-treated and kiln-dried wood for greater moisture resistance and enhanced durability.

DOCK SEAL	PRESSURE-TREATED, KILN-DRIED WOOD FRAME
NOVA FPH	✓ YES
Competitor 1	x NO
Competitor 2	x NO
Competitor 3	x NO

FASTER, EASIER REPAIRS: Unlike competitors who fully wrap the wood backing, the FPH Dock Seal is stitched along the sides for cleaner removal of cover fabrics, easier recovers and less dock downtime.

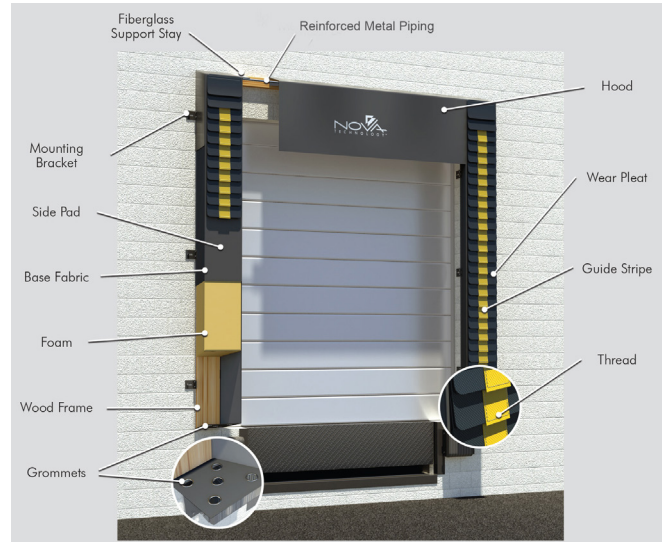

MORE OPTIONS FOR SAFETY, DURABILITY AND STYLE: The FPH Series is available in six fabric selections and four different colors, many available with an optional flame-retardant design that self-extinguishes a flame in two seconds or less.

DOCK SEAL	FLAME-RETARDANT AND SELF-EXTINGUISHING OPTIONS
NOVA FPH	✓ YES
Competitor 1	x NO
Competitor 2	x NO
Competitor 3	x NO

TESTED AND PROVEN TO PERFORM: NOVA's cover materials and fabrics have undergone rigorous testing and feature the highest puncture, tear and abrasion resistance in the industry.

Fabric	FABRIC PROPERTIES & COLORS				Colors
	Abrasion Resistance (cycles)	Tensile Strength (lbs./in.)	Tear Strength (lbs., WxL)	Cold Resistance (at -40°F)	
	Fed Std 5306 ASTM D3884	Fed Std 5100 ASTM D751	Fed Std 5134 ASTM D2261	Fed Std 5874 ASTM D2136	
NOVA MAX-1000™	65000	1000 x 1000	200 x 200	Pass	█
NOVA MAX-60™	3000	950 x 850	160 x 130	Pass	█
40 oz. NOVALON™	1500	400 x 350	50 x 50	Pass	█
16 oz. NOVALON™	100	400 x 350	50 x 40	Pass	█
40 oz. Vinyll	3000	950 x 850	160 x 130	Pass	█ █ █ █
22 oz. Vinyll	1850	695 x 650	120 x 100	Pass	█ █ █ █



WARNING: Cancer and Reproductive Harm-www.P65Warnings.ca.gov